

PRODUCT SPECIFICATION

GEDA Multilift P22

Features & benefits

GEDA Multilift P22 – Safe, Efficient Passenger and goods Hoist

Fully enclosed car and full-height landing gates make this hoist a safe and reliable choice for up to 22 passengers or 2,000 kg of materials. Easy to operate, making it ideal for keeping projects moving smoothly.

Key Features:

- Fully enclosed car & full-height landing gates.
- 2,000 kg / 22 passenger capacity.
- Large 2.9m wide opening C-door.
- Fast, safe travel up to 200m.
- Quick-install, compact design.

Options:

- Erected on a steel base plate.
- Optional anemometer (wind speed)
- Optional wireless car call system
- Hoistway protection panels



Hoist at the landing position


Hoist at the landing position

Wide C gate opening for pallets



Power requirements

Dedicated 415v 63a 5 Pin Commando Socket.

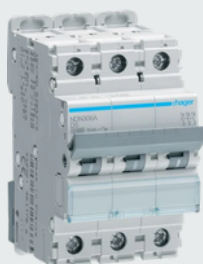

63a Three Phase D Type MCB
300ma RCD

Maximum Height	200m
Lifting Capacity - Goods Mode	2000kg
Lifting Capacity - Personnel Mode	22 Persons
Lifting Speed - Goods Mode	54m / min
Power Source	415v ELECTRIC
Breaker Rating	63a Three Phase D Type MBC
Power Requirements	Dedicated 415v 63a 5 Pin Commando Socket
Start-Up Current (Max)	60a
Running Current	Contact the office
Cage Dimensions	3200mm x 1400mm x 2100mm
Ground Space Required approx.	2310mm x 3970mm

TIE SPACINGS

Depending on Loadings and distance out from the scaffolding, etc. - contact our office for details

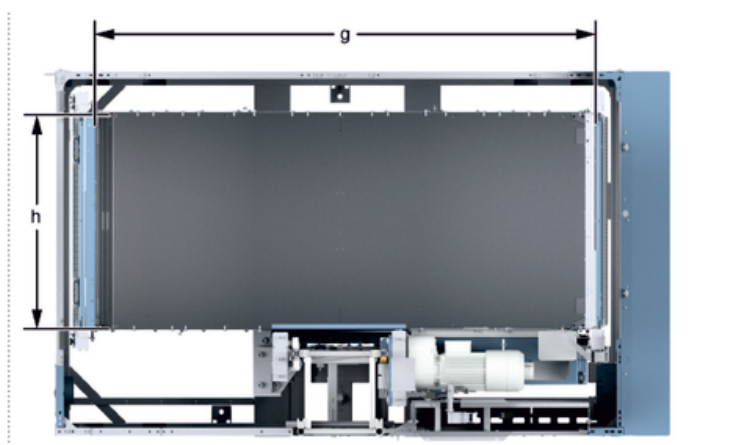
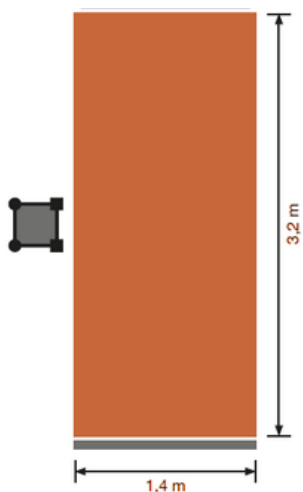
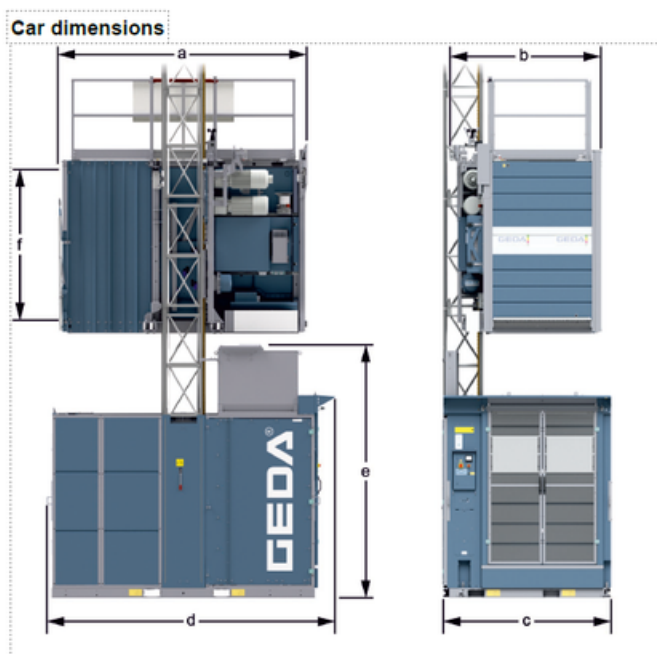
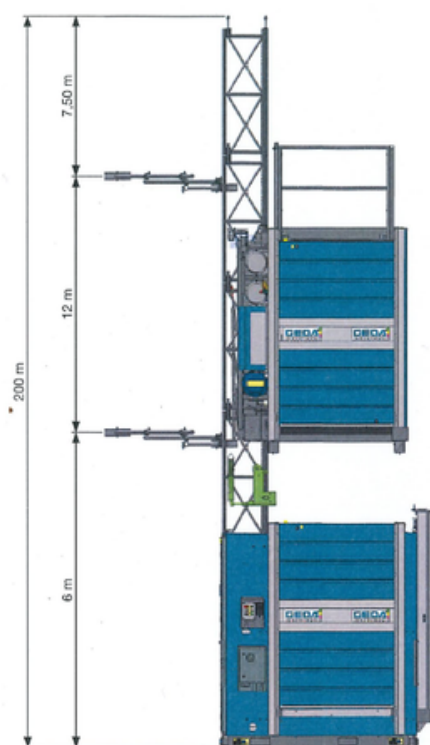


Fig. 4: Dimensions of car

MULTILIFT P22	a	b	c	d	e	f	g	h
Dimensions in m	3.41	2.10	2.31	3.97	3.47	2.10	3.25	1.37