

PRODUCT SPECIFICATION

MABER MBC 2000

Features & benefits

The MABER MBC 2000 heavy-duty goods/passenger hoist is capable of reaching heights of 150 meters with a lifting capacity of 2000kg.

A single-mast dual-purpose hoist that has an additional overhead protection piece that can accommodate 7 passengers in transport platform mode.

The platform size of 3.2m x 1.5m ensures ease of use for loading pallets of plasterboard and offers a fully opening bi-fold C gate.

- 2000kg SWL / 7 persons.
- 415v power supply.
- Up to 150m high.
- Lifting speed personnel 12 m/min.
- Lifting speed goods only 24 m/min.
- Large 3.2m x 1.5m platform with 3 entry-exit points.
- Different ramp configurations are available to suit site needs.



Loading at the base



Hoist at the landing position



Power requirements

Dedicated 415v 63a 5 Pin Commando Socket.



Must use 4mm heavy-duty leads with long runs due to volt drop on start-up currents.

63a Three Phase C Type MCB.




	Maber MBC2000
Maximum Height	150m
Lifting Capacity - Goods Mode	2000kg
Lifting Capacity - Personnel Mode	7 persons
Lifting Speed - Goods Mode	24 m/min
Lifting Speed - Personnel Mode	12 m/min
Power Source	415v Electric
Breaker Rating	63a Three Phase C Type MCB
Power Requirements (Within 2m of the hoist base)	Dedicated 415v 63a 5 Pin Commando Socket
Start up Current (Max)	203a
Running Current (Max)	38a
Cage Dimensions (Internal)	W 1500mm - L 3200mm
Approx. Ground Space Required	3800mm x 4600mm
Approx. Minimum Access Required	Contact us
Approx. Gate Opening Dimentions	2000mm +

Technical information


Standard configuration.

Platform size.

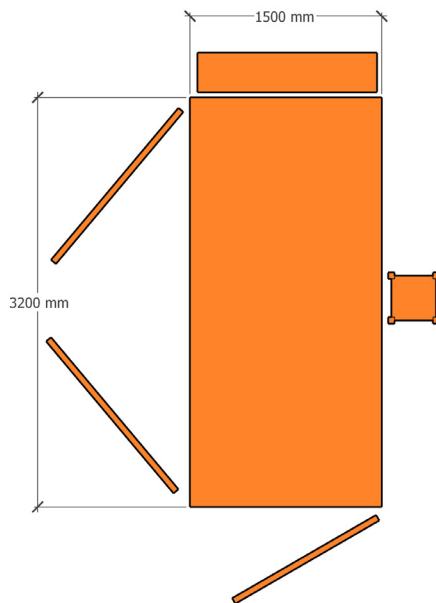


Reversed configuration.

Platform size.

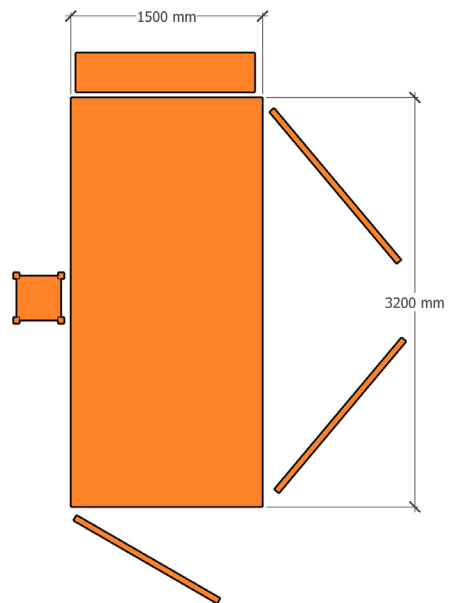

Standard configuration.

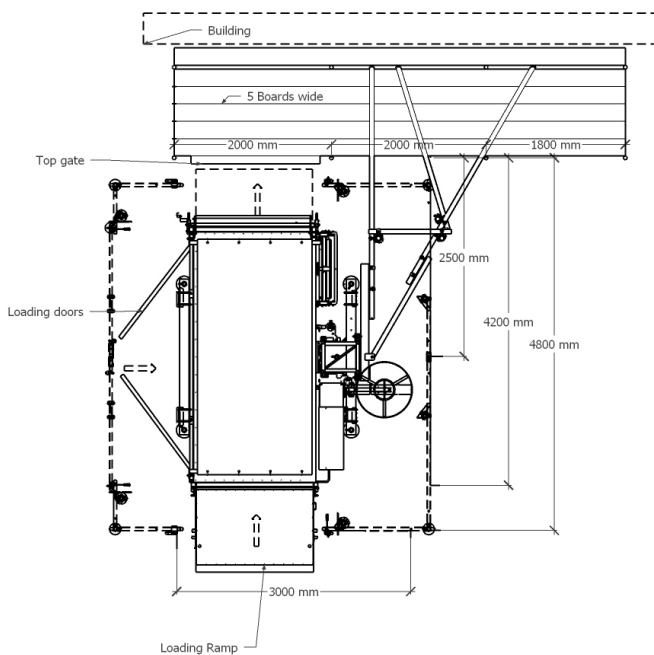

Reversed configuration.

