

PRODUCT SPECIFICATION

GEDA 500Z

Features & benefits

The 500Z has proven itself as a reliable transport helper over many years, with its spacious platform large enough to accommodate two wheelbarrows side by side.

This powerful material hoist offers sufficient space for construction materials up to a weight of 500kg. The platform can be swivelled by 90 degrees allowing safe and comfortable loading and unloading at the landing levels.

- Maximum height up to 100m
- Safe working load of 500kg
- Climbing speed 30 m/min
- Safe mechanical landing gates
- Transported by trailer.
- Can be paired with our 22kva generator.
- Optional Load & Lock Scaffold Rack.



Towed to the site by trailer

Loading at the base



Swinging in platform



Hoist at the landing position



GEDA 500Z

Power requirements

Dedicated 415v 32a 5 Pin Commando Socket.



32a Three Phase C Type MCB.




Can be paired with a 22kva Generator




Must use 4mm heavy-duty leads with long runs due to volt drop on start-up currents.

	Geda 500z
Maximum Height	100m
Lifting Capacity - Goods Mode	500kg
Lifting Capacity - Personnel Mode	n/a
Lifting Speed - Goods Mode	30 m/min
Lifting Speed - Personnel Mode	n/a
Power Source	415v Electric
Breaker Rating	32a Three Phase C Type MCB
Power Requirements (Within 2m of the hoist base)	Dedicated 415v 32a 5 Pin Commando Socket
Start up Current (Max)	60a
Running Current (Max)	13.8a
Cage Dimensions (Internal)	W 1400mm - L 1600mm
Approx. Ground Space Required	2700mm x 3000mm
Approx. Minimum Access Required	W 2300mm - H 2600mm - L 4500mm
Approx. Gate Opening Dimentions	2000mm +

Platform size.

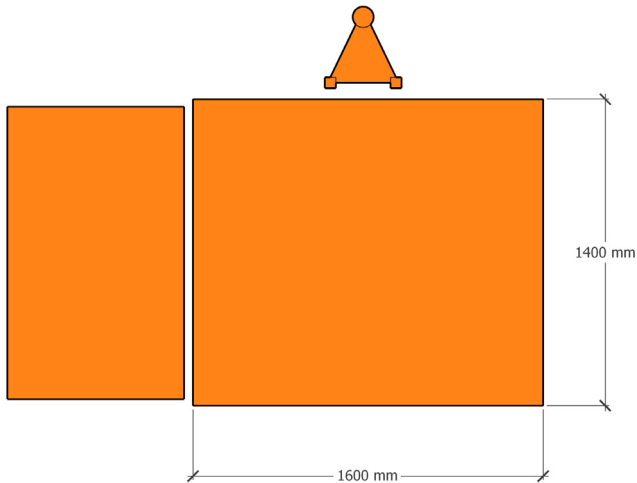

Tie spacing.

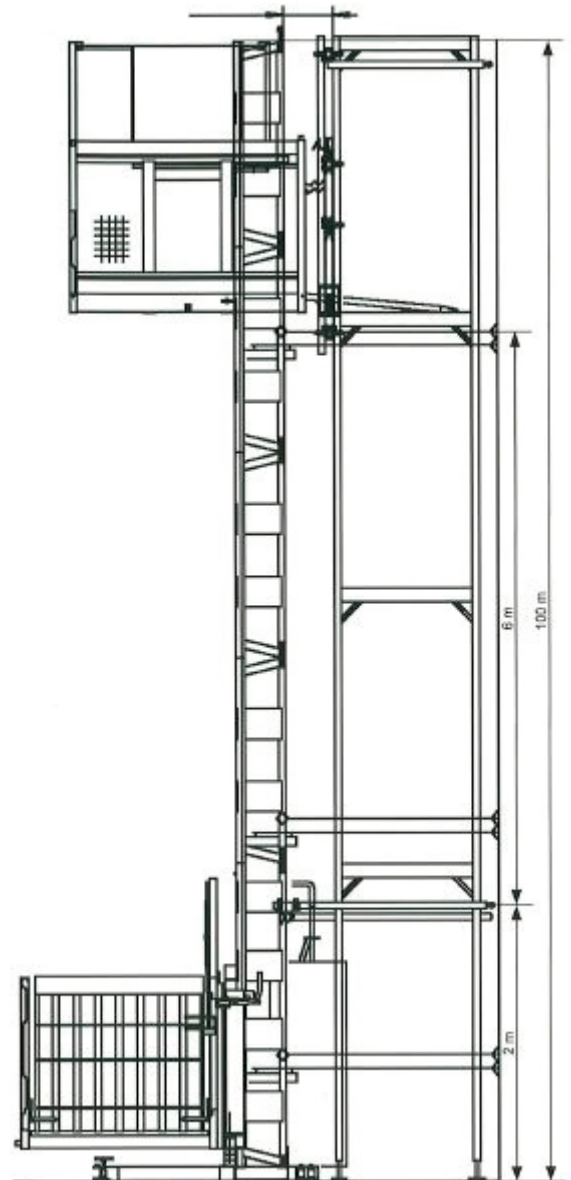

Scaffold installation.

