

## PRODUCT SPECIFICATION

# BOCKER

### Features & benefits

This versatile hoist has many advantages compared with platform hoists.

The trailer-mounted inclined elevator is generally installed serving the front of the scaffold, and in some instances can be installed straight against the building.

This telescopic elevator is mechanically erected, allowing for quick installation and reducing installation costs. Additionally, it can be easily repositioned on-site to a more convenient position as work progresses.

Powered by a petrol engine, with fast-hoisting speed, and two types of carriers, it is the answer for many roofing situations.

- Fast set up in approx. 20 minutes.
- Easily repositioned.
- Operational from 4m – 23m
- Lifting speed of 24 m/min.
- Erected directly onto a roof or a scaffolding.
- Up to 250kg weight capacity.
- Integrated petrol engine.
- Ground space required 5m x 5m approx.



Universal Platform at ground level




Adjustable Platform – unloading at the top



## Adjustable Platform

This versatile adjustable carrier is useful in situations to lift solar panels, sheet materials, boxes or bags of goods that need to be transported on a level platform. This is due to the fact that the sides can be adjusted to be used as a box or a complete flatbed.

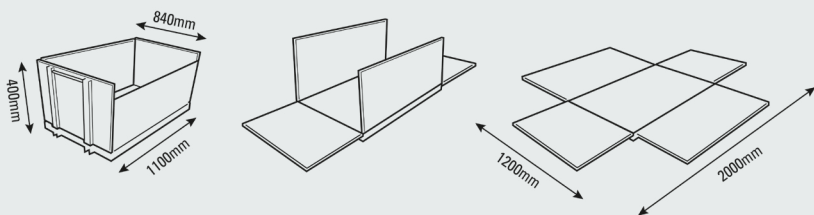


Flat bed platform size: 1200mm x 2000mm x 840mm



## Universal Platform

A general-purpose platform with hinged side guards. Suitable for carrying general roofing materials such as tiles, slates, felt and bricks. With the hinged side guards down, it can carry much larger items such as insulation and general sheet materials.

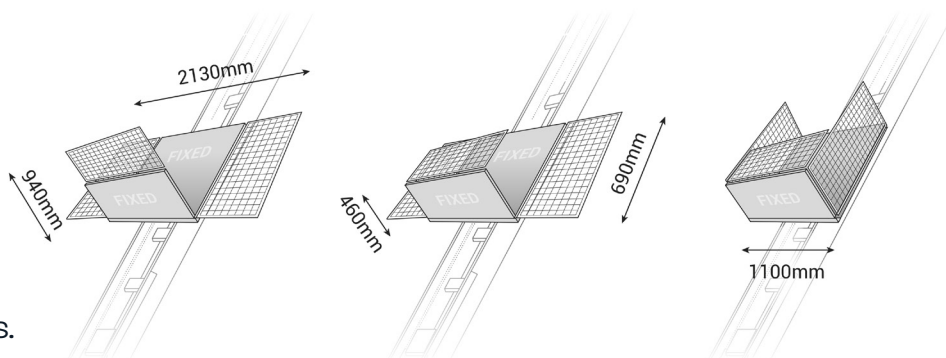

Flat bed platform size: 2130mm x 690mm x 940mm



	<b>Bocker Simply 21</b>	<b>Bocker Junior 18</b>	<b>Bocker Junior 24</b>
<b>Maximum Height</b>	20.6m	17.8m	23.7m
<b>Lifting Capacity - Goods Mode</b>	Up to 250kg	Up to 250kg	Up to 250kg
<b>Lifting Capacity - Personnel Mode</b>	n/a	n/a	n/a
<b>Lifting Speed - Goods Mode</b>	24 m/min	24 m/min	24 m/min
<b>Lifting Speed - Personnel Mode</b>	n/a	n/a	n/a
<b>Power Source</b>	Unleaded Petrol E10	Unleaded Petrol E10	Unleaded Petrol E10
<b>Breaker Rating</b>	n/a	n/a	n/a
<b>Power Requirements</b> (Within 2m of the hoist base)	n/a	n/a	n/a
<b>Start up Current (Max)</b>	n/a	n/a	n/a
<b>Running Current (Max)</b>	n/a	n/a	n/a
<b>Cage Dimensions (Internal)</b>	See Platform type	See Platform type	See Platform type
<b>Approx. Ground Space Required</b>	5000mm x 5000mm	5000mm x 5000mm	5000mm x 5000mm
<b>Approx. Minimum Access Required</b>	W 1470mm x H 2200mm x L 5950mm		
<b>Approx. Gate Opening Dimentions</b>	n/a	n/a	n/a

## Technical information

